


## AVA-HDMI14/H

### 1:4 HDMI 2.0 Distribution Amplifier

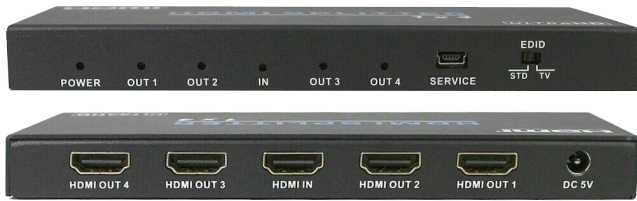

AVA-HDMI14/H distribution amplifier is an advanced solution for splitting HDMI content to 4 HDMI outputs synchronously.

It supports resolution of up to 4K@60Hz (4:4:4) and comes with EDID dip switch to switch between its built in EDID or display EDID.

#### Features

- Supports HDMI 2.0b, HDCP2.2 compliant
- Supports resolution of up to 4K@60Hz 4:4:4
- Supports 3D frame sequential video format up to 4K@30Hz
- Support LPCM 7.1 audio, Dolby® TrueHD and DTS-HD® Master Audio™
- Built in EDID settings

#### Technical specification

##### Video

|                        |   |
|------------------------|---|
| Input:                 | HDMI x 1  |
| Output:                | HDMI x 4  |
| Video Resolution:      | Up to 4K@60Hz 4:4:4                                     |
| HDMI Audio Format:     | LPCM 7.1 audio, Dolby® TrueHD and DTS-HD® Master Audio™ |
| HDMI Version:          | Up to 2.0b  |
| HDCP Version:          | Up to 2.2   |
| Power Supply:          | 5V DC 1A  |
| Power Consumption:     | 2W  |
| Operation Temperature: | 0 to 40°C (32 to 104°F)                                 |
| Storage Temperature:   | -20 to 60°C (-4 to 140°F)                               |
| Relative Humidity:     | 20 to 90%, Non-condensing                               |
| Dimension (W*H*D):     | 63mm x 16mm x 163mm                                     |
| Net Weight:            | 260g  |

## AVA-HDMI14/H

### 1:4 HDMI 2.0 Distribution Amplifier

#### Typical applications

- Corporate Applications (Meeting Room) • Control rooms • Classrooms • Conference rooms • or any installations that requires a simple control system

#### Diagram

